

MCAM-1300

MANUAL CARTRIDGE ASSEMBLY MACHINE

- ULTRASONIC WELD SEAM
- METAL CLIP SEAM
- HOT MELT SEAM

- Servo-driven, PLC controlled with full HMI interface
- Instant automatic no-tool changeover
- Up to 13 inch (330mm) slit widths
- Automatic seam registrations
- Cellulose, synthetic and wire back media
- Adjustable work heights
- Numerous standard options to choose from
- Up to 30ppm or greater operation
- Fast delivery



MANUAL LOAD,
AUTOMATIC SEAM APPLICATION

**AVAILABLE
MODELS**

MCAM-1300-aU
(ULTRASONIC WELD SEAM)

MCAM-1300-C
(METAL CLIP SEAM)


MCAM-1300-H
(HOT MELT SEAM)



+1.320.554.3611 | WWW.MASSMANLLC.COM | SALES@MASSMANLLC.COM

Streamlining Production Through Automation™

MCAM-1300 LAYOUT & FOOTPRINT

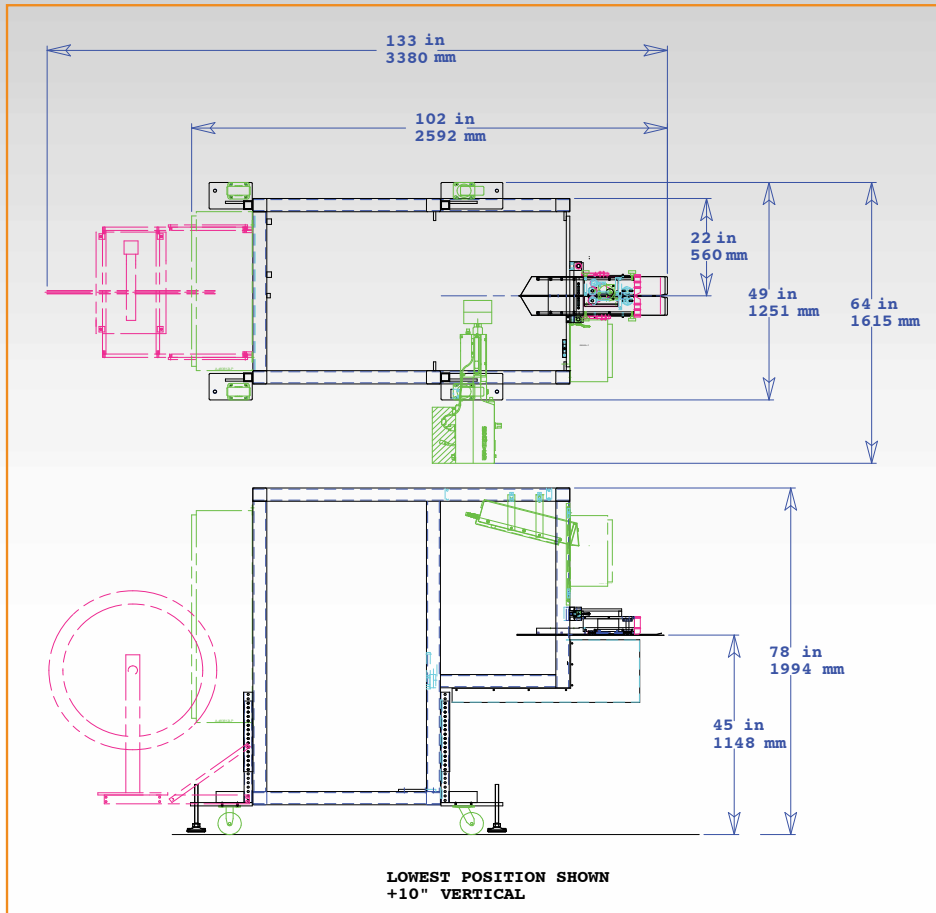

*WB-ACAM equipment can conform to OSHA, UL, CUL, CSA, NFPA and CE standards.
*LISTED DIMENSIONS ARE ONLY FOR REFERENCE AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Product Specifications

MCAM-1300 Design Capability			
Characteristic	MCAM-aU	MCAM-C	MCAM-H
Slit / Length		1.50" – 13.00" (38 – 330mm)	
Pleat Height		0.38" – 1.00" (10 – 25.0mm)	
Media Thickness		0.020" – 0.040" (0.50 – 1.00mm)	
Cycle Speed		up to 25 – 30ppm	

