






TIN TIE APPLICATOR SINGLE FOLD BAG FINISHER

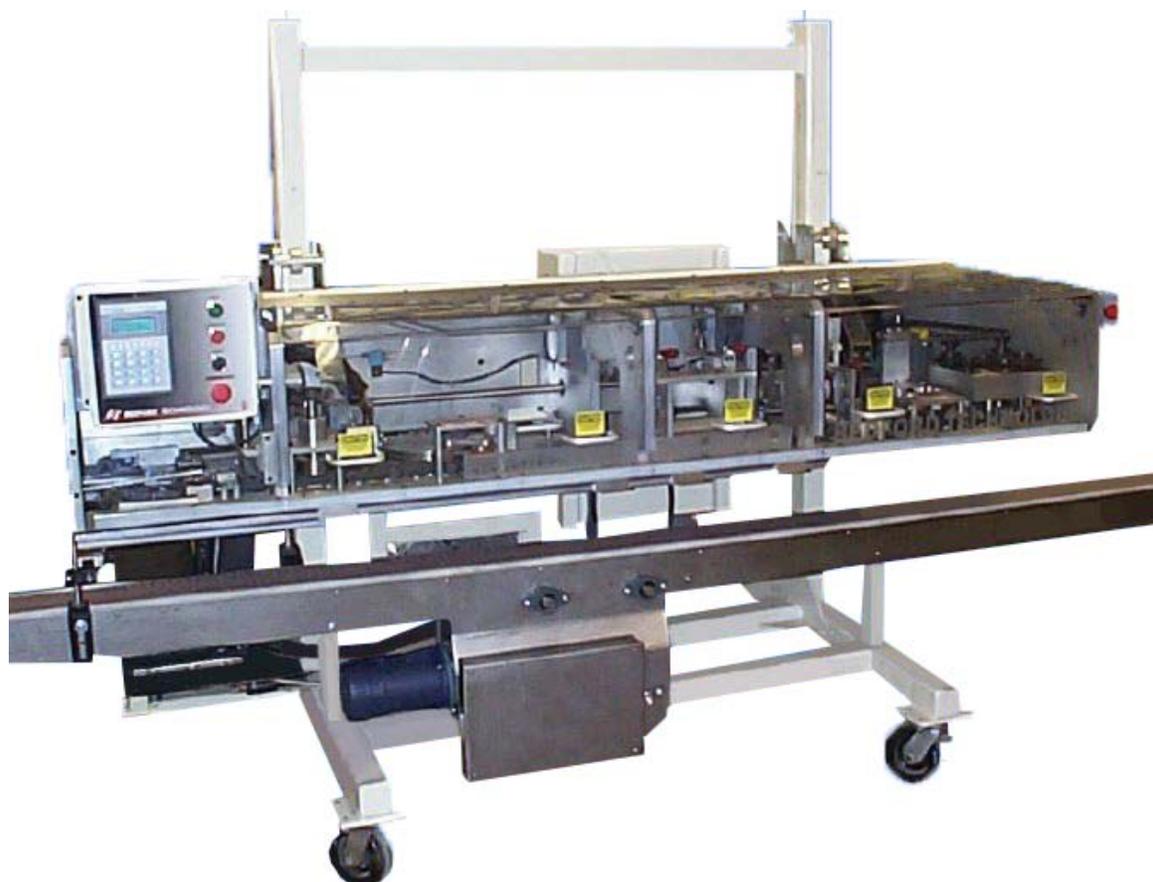

4500 SERIES

The 4500 Series finishes filled and sealed bags by adding the tin tie reclosures and single folding the bag tops. The 4500 Series applies the tin tie to the bags with hot melt adhesive, single folds the bag tops, and automatically bends the tie tabs around to hold the folded flaps. The 4500 Series can be built to place the tin tie inside OR outside the single fold. The 4500 Series can be integrated with a vertical form fill seal machine to provide reclosable packages from a completely automated system.

Automated application of tin tie single folding of bag tops. Automatically bends tie tabs around plc with operator interface process up to 80 bags per minute





TIN TIE APPLICATOR SINGLE FOLD BAG FINISHER

FEATURES

- Robust construction
- Non-stop continuous motion
- Automatic adjustment for face width
- Adjustable machine frame to set machine bed height
- Automatic adjustment for face width and tie length-PLC controlled
- Conveyor rigidly mounted to machine at desired elevation
- Right or Left hand fed models
- Up to 80 bags per minute
- Continuous motion for smooth flow

SPECIFICATION

- Electrical- 240 VAC, 15 AMP, 3 Phase
- Pneumatic- 80 PSI
- Minimum space between bags- 5.5 inches
- Fold dimension- 1-1 1/4 inches
- Tie Tab length- 3/4 to 1 1/4 inch extension
- Bag face width range- 3 to 12 inches
- *Bag height range- 9 to 20 inches
- Minimum flat neck length- 3 inches
- Overall dimensions: conveyor- 4" wide X 136" long machine- 49" wide X 74" tall X 94" long

ADDITIONAL OPTIONS

- UL Electrical listing
- Dual tie spool payouts
- Custom conveyors
- Bag feed spacing unit
- Low tie detect system
- Plow & tape down unit-Add 6100 for tamper evident closures

