




BOTTOM LOAD CASE PACKER

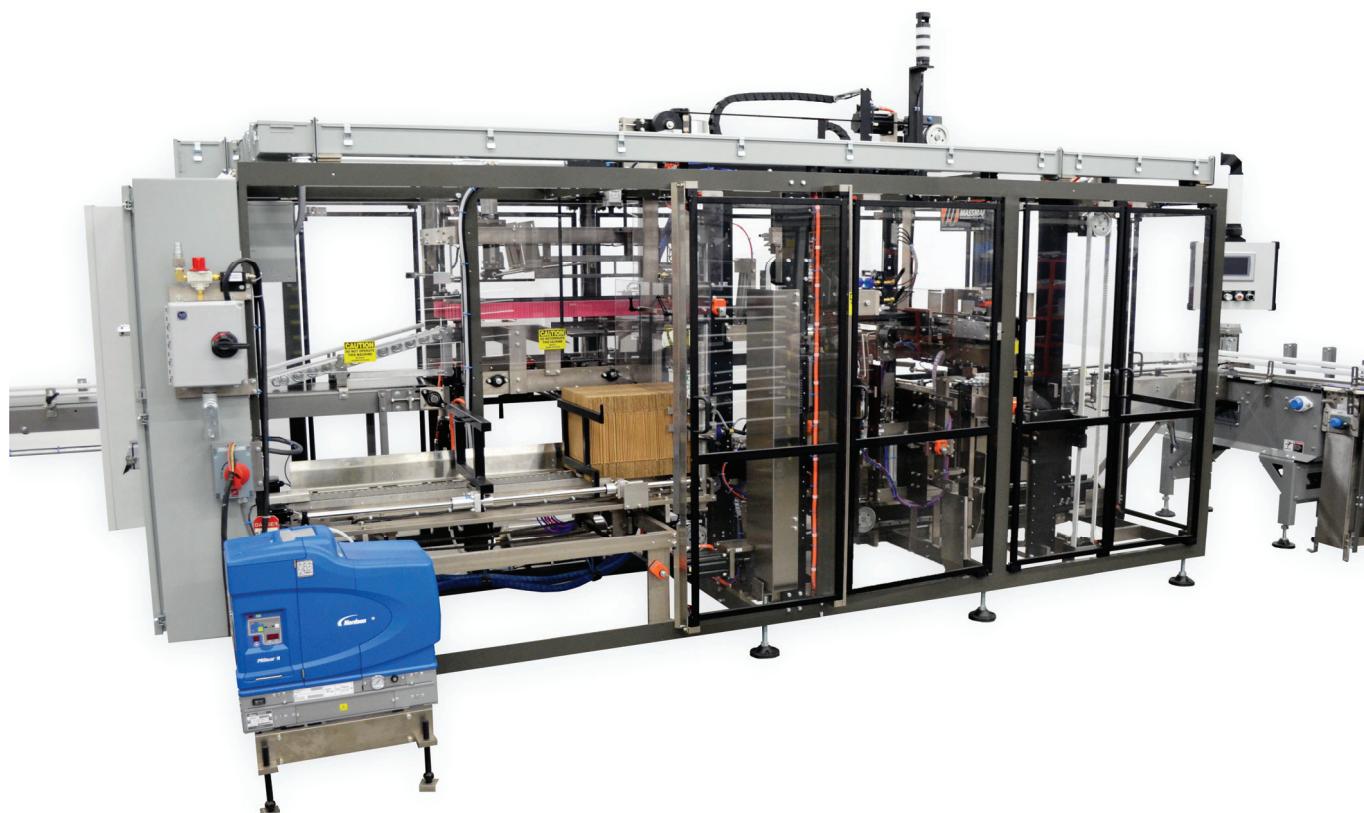


BOTTOM LOAD CASE PACKER

THE BOTTOM LOAD CASE PACKER IS AN EXCELLENT CHOICE FOR PACKING BAGS, FRAGILE PRODUCT, AND PRODUCT NOT PICKABLE BY VACUUM HANDLING. YOUR PRODUCT IS ALWAYS FULLY SUPPORTED WITH GENTLE PRODUCT HANDLING.

THE BOTTOM LOAD DESIGN WITH THE ADDITION OF SERVO TECHNOLOGY CREATES A SMALL FOOT PRINT CASE PACKER, ALLOWING FOR AN EASY TRANSITION FROM HAND PACKAGING TO AUTOMATED CASE PACKING

ADVANTAGES

- GENTLE HANDLING OF PRODUCT
- FLEXIBLE OR COMPLEX PRODUCTS CAN BE LOADED
- CASE FORMING, LOADING AND SEALING IN A SINGLE MACHINE
- COMPACT FOOTPRINT TO RETAIN FLOOR SPACE
- TAPE OR GLUE CLOSURE

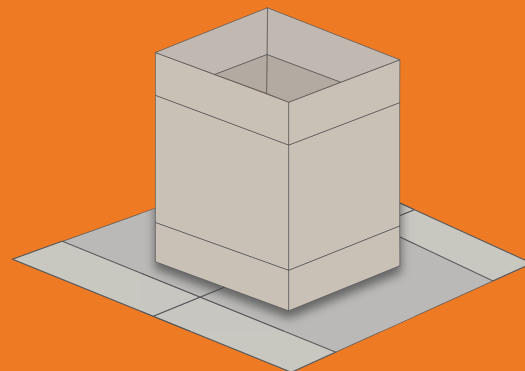

KNOCK DOWN CASE BLANK



BOTTOM LOAD CASE PACKER

SPECIFICATIONS	STANDARD OPTION	ADDITIONAL OPTIONS
CASE BLANK CAPABILITIES	Knock down (KD) type case blanks	Display Trays
INFEED OPTIONS	Single lane infeed with crosspush	Down stacker for multi tiered pack patterns
PRODUCT LOADING	Bottom up load via product elevator through flap funnels	
MAGAZINE	5 ft' low level ergonomic power-feed magazine	
GLUE SYSTEM	NORDSON ProBlue® Series	2 inch wide adhesive tape
GUARD DOORS	Aluminum extruded frame with 1/4" clear or dark acrylic panels	Stainless steel mesh panels
FRAME	1x3 bar stock frame	300 series stainless steel 300 series stainless steel with no penetrations
FRAME FINISH	Powder-coat polyester resin finish	
ELECTRICAL	Allen Bradley Human Machine Interface (HMI) Allen Bradley Panel View 700 with ethernet capabilities (wago) Allen Bradley compact logix PLC with ethernet capabilities Allen Bradley guard door switches (interlock doors) Allen Bradley indramat servo motors and drives Allen Bradley 3-color light stack with audible alarm NEMA 12 electrical enclosure with external power receptacle and computer port Interface wireway Category III safety circuit 480 VAC, 3ø, 60 Hz	Allen Bradley PV 1000+ ethernet capabilities Allen Bradley control logix PLC with ethernet capabilities Allen Bradley Kinetic 6000 servo motors and drives NEMA 4x electrical enclosures and standards 240 VAC, 3ø, 60 Hz
PNEUMATICS	Venturi vacuum generators Festo SMC valves and cylinders Parker fittings	Busch dry vane vacuum pump Centralized enclosure
ADJUSTMENTS	Digital indicator with handwheels Power adjustment for movements over 12"	